

08/31/99  
Jc551 U.S. PTO

A

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of: Yongjun Hu

Title: STRUCTURES AND METHODS TO ENHANCE FIELD EMISSION IN FIELD EMITTER DEVICES

Attorney Docket No.: 303.607US1

**PATENT APPLICATION TRANSMITTAL**

**BOX PATENT APPLICATION**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Jc551 U.S. PTO  
09/30/99  
08/31/99

We are transmitting herewith the following attached items and information (as indicated with an "X"):


- ☒ Utility Patent Application under 37 CFR § 1.53(b) comprising:
- ☒ Specification ( 37 pgs, including claims numbered 1 through 85 and a 1 page Abstract).
  - ☒ Informal Drawing(s) ( 13 sheets).
  - ☒ Signed Declaration ( 3 pgs).
  - ☒ Check in the amount of \$4,426.00 to pay the filing fee.
- ☒ Assignment of the invention to Micron Technology, Inc. ( 2 pgs) and Recordation Form Cover Sheet.
- ☒ Check in the amount of \$40.00 to pay the Assignment recording fee.
- ☒ Return postcard.

The filing fee has been calculated below as follows:

	No. Filed	No. Extra	Rate	Fee
TOTAL CLAIMS	85 - 20 =	65	x 18 =	\$1,170.00
INDEPENDENT CLAIMS	35 - 3 =	32	x 78 =	\$2,496.00
[ ] MULTIPLE DEPENDENT CLAIMS PRESENTED				\$0.00
BASIC FEE				\$760.00
TOTAL				\$4,426.00

Please charge any additional required fees or credit overpayment to Deposit Account No. 19-0743.

SCHWEGMAN, LUNDBERG, WOESSNER & KLUTH, P.A.  
P.O. Box 2938, Minneapolis, MN 55402 (612-373-6900)

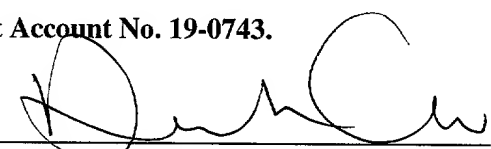By:   
Atty: D. C. Peter Chu  
Reg. No. 41,676

Customer Number **21186**

"Express Mail" mailing label number: EL254618052US

Date of Deposit: August 31, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

By: Chris Hammond

Signature: Chris Hammond

# STRUCTURES AND METHODS TO ENHANCE FIELD EMISSION IN FIELD EMITTER DEVICES

## Field of the Invention

5           The present invention relates generally to semiconductor integrated circuits. More particularly, it pertains to structures and methods to enhance electron emission in a field emitter device.

## Background of the Invention

10           Recent years have seen an increased interest in field emitter displays. This is attributable to the fact that such displays can fulfill the goal of being consumer-affordable hang-on-the-wall flat panel television displays with diagonals in the range of 20 to 60 inches. Certain field emitter displays operate on the same physical principles as cathode ray tube (CRT) based displays. Excited electrons  
15           are guided to a phosphor target to create a display. The phosphor then emits photons in the visible spectrum. This method of operation for field emitter displays relies on an array of field emitter tips.

          Although field emitter displays promise to provide better color and image resolution, one of their problems is that it is difficult to get the field emitter to  
20           emit electrons so as to strike the phosphor target to generate the display. Another problem is that video images on these displays tend to take on undesired viewing characteristics over a relative short period of time. These undesired characteristics might be caused by degradation of the field emitter display due to certain conditions near the vicinity of the field emitter displays. These issues raise  
25           questions about the commercial success of the displays in the marketplace.

          Thus, what is needed are structures and methods to enhance the emission of electrons in field emitter displays while dealing with the degradation of the field emitter over time.

### Summary of the Invention

The above mentioned problems with field emitter displays and other problems are addressed by the present invention and will be understood by reading  
5 and studying the following specification. Structures and methods are described which accord these benefits.

In particular, an illustrative embodiment of the present invention includes a field emitter display device. This device comprises at least one emitter having an implantation that releases electrons at a predetermined energy level. The  
10 implantation enhances the releasing of electrons. The implantation also acts to limit outgassing so as to inhibit the degradation of the at least one emitter. In one embodiment, this implantation is embedded in the surface of the emitter.

These and other embodiments, aspects, advantages, and features of the present invention will be set forth in part in the description which follows, and in  
15 part will become apparent to those skilled in the art by reference to the following description of the invention and referenced drawings or by practice of the invention. The aspects, advantages, and features of the invention are realized and attained by means of the instrumentalities, procedures, and combinations particularly pointed out in the appended claims.

### Brief Description of the Drawings

Figures 1A-1C are a close-up illustration of an emitter tip according to one embodiment of the present invention.

Figure 2 is an illustration of energy levels of field emitters according to  
25 one embodiment of the present invention.

Figure 3 is a planar view of a portion of an array of field emitters according to one embodiment of the present invention.

Figures 4A-4G are planar views of a field emitter device during various

stages of fabrication according to one embodiment of the present invention.

Figures 5A-5H are planar views of a field emitter device during various stages of fabrication according to another embodiment of the present invention.

Figures 6A-6G are planar views of a field emitter device during various stages of fabrication according to another embodiment of the present invention.

Figure 7 illustrates a sample of commercial products using a video display according to one embodiment of the present invention.

Figure 8 is a block diagram that illustrates a flat panel display system according to one embodiment of the present invention.

### Detailed Description

In the following detailed description of the invention, reference is made to the accompanying drawings which form a part hereof, and in which is shown, by way of illustration, specific embodiments in which the invention may be practiced.

In the drawings, like numerals describe substantially similar components throughout the several views. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention. Other embodiments may be utilized and structural, logical, and electrical changes may be made without departing from the scope of the present invention.

The terms wafer and substrate used in the following description include any structure having an exposed surface with which to form the integrated circuit (IC) structure of the invention. The term substrate is understood to include semiconductor wafers. The term substrate is also used to refer to semiconductor structures during processing, and may include other layers that have been fabricated thereupon. Both wafer and substrate include doped and undoped semiconductors, epitaxial semiconductor layers supported by a base semiconductor or insulator, as well as other semiconductor structures well known to one skilled in the art. The term conductor is understood to include semiconductors, and the

term insulator is defined to include any material that is less electrically conductive than the materials referred to as conductors. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims, along with the full scope of  
5 equivalents to which such claims are entitled.

The term "horizontal" as used in this application is defined as a plane parallel to the conventional plane or surface of a wafer or substrate, regardless of the orientation of the wafer or substrate. The term "vertical" refers to a direction perpendicular to the horizontal as defined above. Prepositions, such as  
10 "on," "side" (as in "sidewall"), "higher," "lower," "over," and "under" are defined with respect to the conventional plane or surface being on the top surface of the wafer or substrate, regardless of the orientation of the wafer or substrate.

In the process of identifying ways to emit electrons, it was discovered that  
15 the physical characteristics of the field emitter itself might be affecting the emission of electrons. Additionally, it was discovered that the beam of emitted electrons is smaller in those field emitter displays suffering from image quality degradation. These degraded field emitters were found to be surrounded by substances and compounds near the vicinity of the field emitters. Because the  
20 emitted electrons are the product of the array of tips in the field emitter display, the tip is discussed in detail below.

Figure 1A shows an embodiment of an emitter tip according to an embodiment of the present invention. A field emitter device 120 includes a substrate 100, a cathode tip 101 formed on the substrate 100, gate insulator layer  
25 102, gate lines 116, and a phosphorescent anode 127 in opposing position with respect to the cathode tip 101. The construction of those elements of the field emitter device 120 will be explained below in other figures.

The cathode tip 101 emits electrons in response to the presence of an

electromagnetic field. The phosphorescent anode 127 releases photons when the emitted electrons strike the surface of the phosphorescent anode 127. An array of cathode tips 101 and phosphorescent anodes 127 forms the field emitter display. Video images are shown on the display as a result of the input of visual signals  
5 being modulated by the array of cathode tips 101 and phosphorescent anodes 127.

The cathode tip 101 includes an implantation 118. This implantation 118 affects the physical characteristics of the cathode tip 101 to enhance the releasing of electrons. This will be discussed below. Without this implantation 118, a strong electric field can be used to coerce the cathode tip 101 to emit more  
10 electrons.

Figure 1B shows a method of increasing the emission of electrons through the use of a strong electric field. For illustrative purposes only, the cathode tip 101 is shown as a cone with base radius  $b$  and height  $h$ . For simplifying the analysis, a circular disk 122 of radius  $b$  with uniform surface charge density  $\sigma$  is  
15 assumed. This circular disk lies in the  $x$  plane with its center at the origin.

Since electrons are emitted at point P, the behavior of the electric field at point P is investigated. From Figure 1B, the contribution of the charges on opposite sides of the circular disk 122 to the electric field in the  $x$  direction is canceled. However, the contribution of charges to the electric field in the  $z$   
20 direction is cumulative. Therefore, the electric field at point P contains only the component in the  $z$  direction.

It is understood from the science of electromagnetism that the electric field of point P measuring from circular disk 122 is given by the equation:  $E_z = (\sigma/2\epsilon)(1 - (h / (h^2 + b^2)^{1/2}))$ .  $E_z$  is the electric field in the  $z$  direction,  $\epsilon$  is the  
25 permittivity,  $h$  is the height of the cone 101, and  $b$  is the radius of the cone 101.

Therefore, the electric field is directly proportional to  $\sigma$  and inversely proportional to the radius  $b$  of the cone 101. Increasing the electric field would increase the emission of electrons. Thus to increase the emission of electrons,

more charges must be supplied because of  $\sigma$ ; this would mean imposing a larger potential across the cathode tip 101. Another way to increase the emission of electrons would be to make the tip of the cathode tip 101 sharper; this is accomplished by making the radius  $b$  smaller.

5           Figure 1C shows the cathode tip 101 with the implantation 118. This implantation 118 enhances the releasing of electrons without the need to increase the strength of the electric field. However, in one embodiment, electron emission is further enhanced by using the implantation 118 with an increase in the strength of the electric field.

10           Another benefit of the implantation 118 is that it allows the cathode tip 101 to limit outgassing, which has deteriorating effects upon the field emitter. One way to understand the problem of outgassing is to look at a measurement called the work function. The work function is a quantity of energy that must be supplied to move the electron from the surface of the cathode tip 101. Electrons  
15           that are more tightly bound within the cathode tip 101 require more energy to move. Different materials have different work functions. The cathode tip 101 without the implantation 118 is a source of outgassed materials. These outgassed materials increase the bond that binds the electron in the emitter tip. Therefore, the work function of the cathode tip 101 without the implantation 118 is increased  
20           in the presence of outgassing. As a result, the size of the emitted electron beam is reduced.

          Outgassed substances and compounds exist in the environment near the vicinity of the cathode tip 101. The anode 127, the site that releases photons upon contact by the emitted electrons from the cathode tip 101, is one source of the  
25           outgassing. Another source is the cathode tip 101. The outgassing may contain carbon-based compounds, oxygen, hydrogen, water, argon, nitrogen, moisture, and others. In the absence of implantation 118, these outgassed substances and compounds act against the cathode tip 101. Once the physical structure of the

emitter tip is degraded, the size of the emitted electron beam is correspondingly reduced.

The implantation 118 helps the cathode tip 101 to be stable to limit outgassing so as to inhibit degradation to the cathode tip 101. Stable is understood to mean the inclusion of resistance to forces that disturb or alter the chemical makeup or physical state of the cathode tip 101. In one embodiment, inhibit is understood to mean the inclusion of substantial resistance to the degradation of the cathode tip 101. In another embodiment, inhibit is understood to mean the inclusion of a complete prevention of degradation of the cathode tip 101.

Figure 2 is a graph of energy levels of a field emitter according to one embodiment of the present invention. The graph represents a potential barrier (or potential hill) 20 that has been lowered because of the presence of an energy quantity  $q\Delta\phi$ . An electron must climb to the top 28 of the potential hill to free itself from the field emitter tip to reach the phosphorescent anode.

The potential hill 20 includes Fermi level 22. This level is symbolically represented by  $E_F$ .  $E_F$  is derived from Fermi-Dirac statistical analysis. It is understood that  $E_F$  represents the symmetrical reference point for the probability that a quantity of charges would exist or not exist above and below  $E_F$ . For illustrative purposes in the present embodiment,  $E_F$  is a likely starting point for an electron to begin its ascent to the top 28 to free itself from the tip of the field emitter.

The level 24 ( $E_{v0}$ ) is an energy level, without  $q\Delta\phi$ , that an electron must reach to free itself from the tip of the field emitter. However, in the presence of  $q\Delta\phi$ , the level  $E_{v0}$  is reduced to  $E_{v1}$ . At level  $E_{v1}$ , an electron may free itself with less effort from the tip of the field emitter to reach the phosphorescent anode 127.

The energy quantity  $q\Delta\phi$  is composed of the magnitude of the electronic charge,  $q$ , and  $\Delta\phi$ .  $\Delta\phi$  is a lowering mechanism that reduces the potential hill 20. In one embodiment,  $\Delta\phi$  is described as  $\Delta\phi = (qE / 4\pi\epsilon_s)^{1/2}$ , where:



$\Delta\phi$  is in volts.

$q$  is in coulombs.  $q$  is the magnitude of the electronic charge.

$E$  is in newtons per coulomb.  $E$  is the electric field.

$\epsilon_s$  is in coulombs per volt-meter.  $\epsilon_s$  is the permittivity of the material of the  
5 emitter tip. In one embodiment,  $\epsilon_s$  represents the permittivity of silicon.

Thus to lower the potential hill 20 to allow electrons to escape the field  
emitter tip, the quantity  $q\Delta\phi$  should be increased. Since  $q$  is a constant, the  
controllable quantity is  $\Delta\phi$ . To increase  $\Delta\phi$  would require either increasing the  
electric field  $E$ , decreasing the permittivity  $\epsilon_s$  of the material of the emitter tip, or  
10 both. It is understood that  $\epsilon_s$  is described as  $\epsilon_s = \epsilon_r\epsilon_0$ , where:

$\epsilon_r$  is the relative dielectric constant of the material of the emitter tip.

$\epsilon_0$  is in coulombs per volt-meter.  $\epsilon_0$  is the permittivity of free space.

To decrease the permittivity  $\epsilon_s$  of the material of the emitter tip would  
require decreasing the relative dielectric constant  $\epsilon_r$  since the permittivity of free  
15 space  $\epsilon_0$  is a constant. In one embodiment, the relative dielectric constant  $\epsilon_r$  is the  
relative dielectric constant of silicon.

Another way to understand how emission of electrons can be eased is to  
improve the image force. An image force is created when negative charges are  
brought near the surface of the cathode tip's surface. Positive charges are  
20 attracted to such negative charges and will be induced under the surface of the  
cathode tip. Such induction creates a force that, when combined with an external  
electric field, would reduce the potential barrier. As previously mentioned, this  
potential barrier is the hill that electrons must escape to free themselves from the  
field emitter tip to reach the phosphorescent anode.

25 Yet another way to understand how emission of electrons can be eased is to  
increase the Schottky effect. This effect is realized when a semiconductor material  
is brought in contact with a layer of low relative dielectric constant material. In  
one embodiment, the Fermi level is moved so as to shorten the potential barrier

that the electrons must climb to free themselves from the tip of the field emitter.  
In another embodiment, the top of the potential barrier is lowered.

In yet another way to understand the emission of electrons, by affecting the lowering mechanism, affecting the image force, improving the Schottky effect, or  
5 lowering the dielectric of the field emitter, the energy level by which the electrons must be excited to free them from the electronic bond with the nucleus of the material of the cathode tip and move them from the cathode tip is reduced.

Figure 3 is a planar view of an embodiment of a portion of an array of field emitter devices including 350A, 350B, 350C, . . . , 350N, and constructed  
10 according to an embodiment of the present invention. The field emitter array 305 includes a number of cathodes, 301<sub>1</sub>, 301<sub>2</sub>, 301<sub>3</sub>, . . . , 301<sub>n</sub>, formed in rows along a substrate 300. A gate insulator 302 is formed along the substrate 300 and surrounds the cathodes. A number of gate lines 316 are on the gate insulator. A number of anodes including 327<sub>1</sub>, 327<sub>2</sub>, 327<sub>3</sub>, . . . , 327<sub>n</sub> are formed in columns  
15 orthogonal to and opposing the rows of cathodes. In one embodiment, the anodes include multiple phosphors. In another embodiment, the anodes are coated with phosphorescent or luminescent substances or compounds. Additionally, the intersections of the rows and columns form pixels.

Each field emitter device in the array, 350A, 350B, . . . , 350N, is  
20 constructed in a similar manner. Thus, only one field emitter device 350N is described herein in detail. All of the field emitter devices are formed along the surface of a substrate 300. In one embodiment, the substrate includes a doped silicon substrate 300. In an alternate embodiment, the substrate is a glass substrate 300, including silicon dioxide (SiO<sub>2</sub>). Each field emitter device 350  
25 includes a cathode 301 formed in a cathode region 325 of the substrate 300. The cathode 301 includes a polysilicon cone 301. In one exemplary embodiment, the polysilicon cone 301 includes an implantation 318.

A gate insulator 302 is formed in an insulator region 312 of the substrate

300. The cathode 301 and the gate insulator 302 have been formed, in one embodiment, from a single layer of polysilicon. A gate 316 is formed on the gate insulator 302.

An anode 327 opposes the cathode 301. In one embodiment, the anode is covered with light emitting substances or compounds that are luminescent or phosphorescent.

Figures 4A-4G show a process of fabrication for a field emitter device according to one embodiment of the present invention. Figure 4A shows the structure focusing on the cathode tip, after tip sharpening, following the first stages of processing. One with ordinary skill in the art would be familiar with these stages of processing.

Figure 4B shows the structure during an implantation of a dose of ions into a portion of the cathode tip 401. In one embodiment, the implantation is a shallow implantation using low energy. In another embodiment, the ions are implanted to form an implantation layer 418 at about 50 to 100 Angstroms from the surface of the portion of the cathode tip 401. In another embodiment, the dose of ions is a high dose that includes  $10^{17}$  per square centimeter of ions. In another embodiment, the ion is one species of atomic oxygen, such as  $O^+$ . In another embodiment, the ion forms an oxide compound with the material of the cathode tip; in this embodiment, the ion includes  $O^{2-}$  ions. In another embodiment, the ion forms a superoxide compound with the material of the cathode tip; in this embodiment, the ion includes  $O_2^-$  ions. In another embodiment, the ion forms a peroxide compound with the material of the cathode tip. In one embodiment, the implantation layer 418 that is formed is a silicon oxide layer; it is understood that the relative dielectric constant of the silicon oxide layer with bubbles or other imperfections is approximately 3.0 whereas the relative dielectric constant of silicon is about 12. In yet another embodiment, the ion is one species of atomic nitrogen. In a further embodiment, the ion is an ionic nitride. It is understood

that a compound of silicon nitride has a relative dielectric constant of about 7.5 whereas the relative dielectric constant of silicon is about 12.

Figure 4C shows the structure after the next sequence of fabrication stages.

In one embodiment, an annealing process is used upon the cathode tip 401 to stabilize the ion implantation to form the implantation 418. The structure now appears as in Figure 4C. In one embodiment, the annealing process is a rapid thermal process using nitrogen. The temperature range for such a process is about 850 degrees Celsius to about 1000 degrees Celsius.

Figure 4D shows the structure following the next sequence of processing.

The insulator 408 may be referred to as a gate insulator or grid dielectric. The insulator 408 is formed over the cathode tip 401 and the substrate 400. The regions of the insulator 408 that surround the cathode tip 401 constitute an insulator region 412 for the field emitter device.

Figure 4E shows the structure following the next stages of processing. A gate or gate layer 416 is formed on the insulator layer 408. The gate layer 416 includes any conductive layer material and can be formed using any suitable technique. One exemplary technique includes chemical vapor deposition (CVD).

Figure 4F shows the structure following the next stages of processing. Following deposition, the gate layer 416 undergoes a removal stage. In one embodiment, the gate layer 416 is removed until a portion of the insulator layer 408, covering the cathode tip 401, is revealed.

Figure 4G shows the structure after the next sequence of processing. Here a portion of the insulator layer 408 is removed from the surrounding of the cathode tip 401. The portion of the insulator layer 408 is removed using any suitable technique as will be understood by one of ordinary skill in the field of semiconductor processing and field emission device fabrication; one exemplary technique includes using reactive ion etching. The formation of the anode 427 is further formed opposing the cathode tip 401 in order to complete the field

emission device. The formation of the anode, and completion of the field emission device structure, can be achieved in numerous ways as will be understood by those of ordinary skill in the art of semiconductor and field emission device fabrication.

5        Figures 5A-5H show fabrication of a field emitter device according to one embodiment of the present invention. Figure 5A shows the structure focusing on the cathode tip, after tip sharpening, following the first stages of processing.

Figure 5B shows the structure following the next sequence of processing. The insulator 508 is also known as a gate insulator, or grid dielectric. The  
10        insulator 508 is formed over the cathode tip 501 and the substrate 500. The regions of the insulator 508 that surround the cathode tip 501 constitute an insulator region 512 for the field emitter device.

Figure 5C shows the structure following the next stages of processing. A gate or gate layer 516 is formed on the insulator layer 508. The gate layer 516  
15        includes any conductive layer material and can be formed using any suitable technique. One exemplary technique includes chemical vapor deposition (CVD).

Figure 5D shows the structure following the next stages of processing. Following deposition, the gate layer 516 undergoes a removal stage. The gate layer 516 is removed using a suitable technique until a portion of the insulator  
20        layer 508, covering the cathode tip 501, is revealed; one exemplary technique includes chemical mechanical planarization.

Figure 5E shows the structure after the next sequence of processing. Here a portion of the insulator layer 508 is removed from the surrounding of the cathode tip 501. The portion of the insulator layer 508 is removed using any  
25        suitable technique as will be understood by one of ordinary skill in the field of semiconductor processing and field emission device fabrication; one exemplary technique includes a combination of a lift-off technique and reactive ion etching process.

Figure 5F shows the structure during an implantation of a dose of ions into a portion of the cathode tip 501. In one embodiment, the implantation is a shallow implantation using low energy. In another embodiment, the ions are implanted at about 50 to 100 Angstroms from the surface of the portion of the cathode tip 501.

5 In another embodiment, the dose of ions is a high dose that includes  $10^{17}$  per square centimeter of ions. In another embodiment, the ion is one species of atomic oxygen, such as  $O^+$ . In another embodiment, the ion forms an oxide compound with the material of the cathode tip; in this embodiment, the ion includes  $O^{2-}$  ions. In another embodiment, the ion forms a superoxide compound  
10 with the material of the cathode tip; in this embodiment, the ion includes  $O_2^-$  ions. In one embodiment, the implantation layer 418 that is formed is a silicon oxide layer; it is understood that the relative dielectric constant of the silicon oxide layer is approximately 4 whereas the relative dielectric constant of silicon is about 12. In yet another embodiment, the ion is one species of atomic nitrogen. In a further  
15 embodiment, the ion is an ionic nitride. It is understood that a compound of silicon nitride has a relative dielectric constant of approximately 7.5 whereas the relative dielectric constant of silicon is about 12.

Figure 5G shows the structure after the next sequence of fabrication stages. In one embodiment, an annealing process is used upon the cathode tip 501 to  
20 stabilize the ion implantation to form the implantation 518. The structure now appears as in Figure 5G. In one embodiment, the annealing process is a rapid thermal process using nitrogen. In a further embodiment, the temperature range for such a process is about 850 degrees Celsius to about 1000 degrees Celsius.

Figure 5H shows the structure after the next sequence of processing. The  
25 formation of the anode 527 is further formed opposing the cathode tip 501 in order to complete the field emission device. The formation of the anode, and the completion of the field emission device structure, can be achieved in numerous ways as will be understood by those of ordinary skill in the art of semiconductor

and field emission device fabrication. The formation of the anodes, and completion of the field emission device itself, do not limit the present invention and as such are not presented in full detail here.

Figures 6A-6G show a process of fabrication for a field emitter device according to an embodiment of the present invention. Figure 6A shows the structure focusing on the cathode tip, after tip sharpening, following the first stages of processing. One with ordinary skill in the art would be familiar with these stages of processing.

Figure 6B shows the structure during the process of implantation of at least a portion of the cathode tip 601 with a layer of low relative dielectric constant material. In one embodiment, a uniform-step-coverage technique is used to apply a layer of the low relative dielectric constant material with uniform thickness. In one embodiment, the layer of low relative dielectric constant has a value less than about the relative dielectric constant of the material of the cathode tip 601. In another embodiment, the layer of low relative dielectric constant has a value less than about 50 percent of the relative dielectric constant of the material of the cathode tip 601. In another embodiment, the layer of low relative dielectric constant has a value less than about 5. In yet another embodiment, the layer of low relative dielectric constant has a value less than about 12.

Figure 6C shows the structure after the next sequence of fabrication stages. In one embodiment, a layer of silicon 606 is used to cover the layer 605. In another embodiment, the silicon layer 606 includes a thickness of 50 to 100 Angstroms. Having covered up the layer 605 with the layer of amorphous silicon 606, an implantation 618 is defined. In one embodiment, the layer of silicon 606 is continuous. In another embodiment, the layer of silicon 606 is a thin film, about 50 to 100 Angstroms. Reducing the thickness of the layer of silicon 606 tends to reduce outgassing within the vicinity of the cathode tip 601.

Figure 6D shows the structure following the next sequence of processing.

The insulator 608 may be referred to as a gate insulator or grid dielectric. The insulator 608 is formed over the cathode tip 601 and the substrate 600. The regions of the insulator 608 that surround the cathode tip 601 constitute an insulator region 612 for the field emitter device.

5           Figure 6E shows the structure following the next stages of processing. A gate, or gate layer 616, is formed on the insulator layer 608. The gate layer 616 includes any conductive layer material and can be formed using any suitable technique, such as sputtering or chemical vapor deposition.

          Figure 6F shows the structure following the next stages of processing.  
10       Following deposition, the gate layer 616 undergoes a removal stage. In one embodiment, the gate layer 616 is removed until a portion of the insulator layer 608, covering the cathode tip 601, is revealed.

          Figure 6G shows the structure after the next sequence of processing. Here a portion of the insulator layer 608 is removed from the surrounding of the  
15       cathode tip 601. The portion of the insulator layer 608 is removed using any suitable technique as will be understood by one of ordinary skill in the field of semiconductor processing and field emission device fabrication. One exemplary technique includes a combination of a lift-off technique and reactive ion etching.

          The formation of the anode 627 is further formed opposing the cathode tip  
20       601 in order to complete the field emission device. The formation of the anode, and completion of the field emission device structure, can be achieved in numerous ways as will be understood by those of ordinary skill in the art of semiconductor and field emission device fabrication. The formation of the anodes and completion of the field emission device do not limit the present invention and  
25       as such are not presented in full detail here.

          Figure 7 shows exemplary video display products using an array of field emitter devices 708 in accordance with an embodiment of the present invention. The array of field emitter devices 708 are described and presented above in



connection with the above figures. In one embodiment, the video display product is a camcorder 702; the camcorder 702 includes a camcorder viewfinder incorporating an array of field emission devices. In another embodiment, the video display product is a flat-screen television 704 incorporating an array of field emission devices. In a further embodiment, the video display product is a personal appliance 706 incorporating an array of field emission devices. In all embodiments, the video display product includes a display screen for showing a video image.

Figure 8 is a block diagram that illustrates an embodiment of a flat panel display system 850 according to an embodiment of the present invention. A flat panel display includes a field emitter array formed on a glass substrate. The field emitter array includes a field emitter array 830 as described and presented above in connection with the above Figures. A row decoder 820 and a column decoder 810 each couple to the field emitter array 830 in order to selectively access the array. Further, a processor 840 is included which is adapted to receiving input signals and providing the input signals to address the row and column decoders 820 and 810.

### Conclusion

Thus, structures and methods have been described to enhance electron emission and to limit outgassing in field emitter devices. The various embodiments can be operated in severe environments, such as in temperatures above room temperature, in space applications, and in aqueous environments. Additionally, the invention is especially appropriate for mobile applications since it can be operated with a low power supply.

Although the specific embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that any arrangement which is calculated to achieve the same purpose may be substituted

for the specific embodiment shown. This application is intended to cover any adaptations or variations of the present invention. It is to be understood that the above description is intended to be illustrative, and not restrictive. Combinations of the above embodiments and other embodiments will be apparent to those of skill  
5 in the art upon reviewing the above description. The scope of the invention includes any other applications in which the above structures and fabrication methods are used. Accordingly, the scope of the invention should only be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

10

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2

What is claimed is:

1. A field emitter display device, comprising:  
at least one emitter having an implanted oxide layer that releases electrons  
5 at a predetermined energy level.
2. The device of claim 1, wherein the implanted oxide layer inhibits  
outgassing that includes moisture.
- 10 3. A field emitter display device, comprising:  
at least one emitter having an implantation that releases electrons at a  
predetermined energy level, wherein the implantation lowers the potential barrier  
to enhance the releasing of electrons.
- 15 4. The device of claim 3, wherein the implantation is a layer underneath the  
surface of the at least one emitter.
5. A field emitter display device, comprising:  
at least one emitter having an implantation that emits electrons at a  
20 predetermined energy level, wherein the implantation affects the lowering  
mechanism so as to enhance the emission of electrons.

6. The device of claim 5, wherein the implantation is a layer underneath the surface of the at least one emitter.

5 7. A field emitter display device, comprising:  
at least one emitter having an implantation that releases electrons at a predetermined energy level, wherein the implantation affects the image force so as to enhance the releasing of electrons.

10 8. The device of claim 7, wherein the implantation is a layer underneath the surface of the at least one emitter.

9. A field emitter display device, comprising:  
at least one emitter having an implantation that emits electrons at a  
15 predetermined energy level, wherein the implantation enhances the Schottky effect so as to enhance the emission of electrons.

10. The device of claim 9, wherein the implantation is a layer underneath the surface of the at least one emitter.

20

11. A field emitter display device, comprising:

at least one emitter having an implantation that releases electrons at a predetermined energy level, wherein the implantation decreases the dielectric effect of the at least one emitter to enhance the releasing of electrons.

5 12. The device of claim 11, wherein the implantation is a layer underneath the surface of the at least one emitter.

13. A field emitter display device, comprising:

10 at least one emitter having a layer that releases electrons at a predetermined energy level, wherein the layer enhances the releasing of electrons and the layer limits the outgassing so as to inhibit degradation of the at least one emitter.

14. The device of claim 13, wherein the layer is embedded in the surface of the at least one emitter.

15

15. A field emitter display device, comprising:

at least one emitter having a layer that releases electrons at a predetermined energy level, wherein the layer lowers the potential barrier to enhance the releasing of electrons and the layer limits the outgassing so as to inhibit  
20 degradation of the at least one emitter.

16. The device of claim 15, wherein the layer is embedded in the surface of the at least one emitter.

17. A field emitter display device, comprising:

5 at least one emitter having a layer that releases electrons at a predetermined energy level, wherein the layer affects the image force so as to enhance the releasing of electrons and the layer limits the outgassing so as to inhibit degradation of the at least one emitter.

10 18. The device of claim 17, wherein the layer is embedded in the surface of the at least one emitter.

19. A field emitter display device, comprising:

15 at least one emitter having a layer that emits electrons at a predetermined energy level, wherein the layer improves the Schottky effect so as to enhance the emission of electrons and the layer limits the outgassing so as to inhibit degradation of the at least one emitter.

20. The device of claim 19, wherein the layer is embedded in the surface of the at least one emitter.

21. A field emitter display device, comprising:

at least one emitter having a layer that releases electrons at a predetermined energy level, wherein the layer decreases the dielectric effect of the at least one emitter to enhance the releasing of electrons and the layer limits the outgassing so as to inhibit degradation of the at least one emitter.

22. The device of claim 21, wherein the layer is embedded in the surface of the at least one emitter.

23. A field emitter display device, comprising:

at least one emitter having a silicon oxide layer.

24. A field emitter display device, comprising:

at least one emitter having an oxide layer that releases electrons at a predetermined energy level.

25. A field emitter display device, comprising:

at least one emitter having an embedded silicon oxide layer.

26. The device of claim 25, wherein the embedded silicon oxide layer is formed by an implantation process.

27. A field emitter display device, comprising:

at least one emitter having an external coating and an embedded layer that releases electrons at a predetermined energy level, wherein the embedded layer  
5 limits outgassing to inhibit degradation of the at least one emitter and enhances the releasing of electrons.

28. A field emitter display device, comprising:

at least one emitter having an external coating and an embedded layer that  
10 releases electrons at a predetermined energy level, wherein the embedded layer limits outgassing to inhibit degradation of the at least one emitter and lowers the potential barrier to enhance the releasing of electrons.

29. A field emitter display device, comprising:

15 at least one emitter having an external coating and an embedded layer that releases electrons at a predetermined energy level, wherein the embedded layer limits outgassing to inhibit degradation of the at least one emitter and affects the lowering mechanism so as to enhance the emission of electrons.

20 30. A field emitter display device, comprising:

at least one emitter having an external coating and an embedded layer that



releases electrons at a predetermined energy level, wherein the embedded layer limits outgassing to inhibit degradation of the at least one emitter and affects the image force so as to enhance the releasing of electrons.

5 31. A field emitter display device, comprising:

at least one emitter having an external coating and an embedded layer that releases electrons at a predetermined energy level, wherein the embedded layer limits outgassing to inhibit degradation of the at least one emitter and improves the Schottky effect so as to enhance the emission of electrons.

10

32. A field emitter display device, comprising:

at least one emitter having an external coating and an embedded layer that releases electrons at a predetermined energy level, wherein the embedded layer limits outgassing to inhibit degradation of the at least one emitter and decreases the dielectric effect of the at least one emitter to enhance the releasing of electrons.

15

33. A field emitter display device, comprising:

at least one emitter having an implantation that releases electrons at a predetermined energy level, wherein the implantation reduces the potential barrier to enhance the releasing of electrons and inhibits degradation of the at least one emitter in the presence of the outgassing; and

20

a light-emitting target that radiates when the released electrons strike the  
light-emitting target.

34. The device of claim 33, wherein the light-emitting target is coated with  
5 luminescent matter.

35. The device of claim 33, wherein the light-emitting target is coated with  
phosphorescent matter.

10 36. A video display, comprising:  
a display screen for showing a video image; and  
an array of field emission devices capable of forming the video image,  
wherein the array of field emission devices comprises:  
at least one emitter having an implantation that releases electrons at  
15 a predetermined energy level, wherein the implantation reduces the dielectric  
effect of the at least one emitter and is stable in the presence of the outgassing; and  
a light-emitting target that radiates when the released electrons  
strike the light-emitting target.

20 37. A method for enhancing the emission of electrons in a field emitter device,  
comprising:

forming at least one tip behaving as cathodes in the field emitter device, the  
at least one tip emitting electrons at a predetermined energy level;

forming at least one phosphorescent target behaving as anodes in the field  
emitter device, the at least one phosphorescent target receptive to the emitted  
5 electrons; and

implanting the at least one tip with a layer having a reduced dielectric  
constant, the layer enhancing the emission of electrons and limiting the outgassing  
so as to inhibit degradation in the field emitter device.

10 38. The method of claim 37, wherein the method proceeds in the order  
presented.

39. The method of claim 37, wherein implanting the at least one tip with a  
layer comprises implanting with the layer that affects the image force so as to  
15 enhance the emission of electrons.

40. The method of claim 37, wherein implanting the at least one tip with a  
layer comprises implanting with the layer that improves the Schottky effect so as  
to enhance the emission of electrons.

20

41. A method of forming a field emission device, comprising:

forming an emitter tip on a substrate;

forming a substance on at least a portion of the emitter tip, wherein the substance decreases the dielectric effect of the emitter tip; and

forming an anode opposite the emitter tip.

5

42. The method of claim 41, wherein forming the substance comprises forming the substance that lowers the potential barrier to enhance the emission of electrons.

43. The method of claim 41, wherein forming the substance comprises forming the substance that affects the image force so as to enhance the emission of electrons.

44. The method of claim 41, wherein forming the substance comprises forming the substance that improves the Schottky effect so as to enhance the emission of electrons.

45. A method of forming a field emission device, comprising:

forming an emitter tip on a substrate;

implanting a substance to form a compound in at least a portion of the

emitter tip, wherein the implanting reduces the dielectric effect of the emitter; and

forming an anode opposite the emitter tip.

46. The method of claim 45, wherein implanting the substance to form the compound comprises implanting the substance that lowers the potential barrier to enhance the emission of electrons.

5

47. The method of claim 45, wherein implanting the substance to form the compound comprises implanting the substance that affects the image force so as to enhance the emission of electrons.

10 48. The method of claim 45, wherein implanting the substance to form the compound comprises implanting the substance that improves the Schottky effect so as to enhance the emission of electrons.

49. A method of forming a field emission device, comprising:  
15 forming an emitter tip on a substrate;  
implanting oxygen ions in at least a portion of the emitter tip; and  
forming an anode opposite the emitter tip.

50. The method of claim 49, wherein implanting oxygen ions comprises  
20 implanting  $O^-$  ions.

51. The method of claim 49, wherein implanting oxygen ions comprises implanting  $O^{2-}$  ions.

52. The method of claim 49, wherein implanting oxygen ions comprises  
5 implanting  $O_2^-$  ions.

53. The method of claim 49, wherein implanting oxygen ions comprises implanting a species of oxygen ions to form a silicon dioxide compound.

10 54. A method of forming a field emission device, comprising:  
forming an emitter tip on a substrate;  
implanting a predetermined dose of oxygen ions in at least a portion of the  
emitter tip; and  
forming an anode opposite the emitter tip.

15 55. The method of claim 54, wherein implanting the predetermined dose of oxygen ions comprises implanting the predetermined dose of oxygen ions on the order of about  $10^{17}$  per square centimeter.

20 56. The method of claim 54, further comprising annealing to stabilize the oxygen ions embedded in the emitter tip.

57. The method of claim 56, wherein annealing to stabilize the compound comprises annealing through a rapid thermal process using nitrogen.

5 58. The method of claim 56, wherein annealing occurs in a temperature greater than about 850 degrees Celsius.

59. The method of claim 56, wherein annealing occurs in a temperature less than about 1000 degrees Celsius.

10

60. The method of claim 56, wherein annealing occurs in a temperature greater than about 850 degrees Celsius and less than about 1000 degrees Celsius.

61. A method of forming a field emission device, comprising:

15

forming an emitter tip on a substrate;

implanting a predetermined dose of oxygen ions to form a compound in at least a portion of the emitter tip;

annealing to stabilize the compound embedded in the emitter tip; and

forming an anode opposite the emitter tip.

20

62. The method of claim 61, wherein implanting the predetermined dose of oxygen ions comprises implanting a desired dose of oxygen ions on the order of about  $10^{17}$  per square centimeter.

5 63. The method of claim 61, wherein annealing to stabilize the compound comprises annealing through a rapid thermal process using nitrogen.

64. The method of claim 61, wherein annealing to stabilize the compound comprises annealing in a temperature greater than about 850 degrees Celsius and  
10 less than about 1000 degrees Celsius.

65. The method of claim 61, wherein the method proceeds in the order presented.

15 66. A method of forming a field emission device, comprising:  
forming an emitter tip on a substrate;  
implanting oxygen ions at a predetermined depth greater than about 50  
Angstroms and less than about 100 Angstroms from the surface of the emitter tip;  
annealing to stabilize the oxygen ions embedded in the emitter tip; and  
20 forming an anode opposite the emitter tip.



67. The method of claim 66, wherein implanting oxygen ions comprises implanting a desired dose of oxygen ions on the order of about  $10^{17}$  per square centimeter.

5 68. The method of claim 66, wherein annealing to stabilize the compound comprises annealing through a rapid thermal process using nitrogen.

69. The method of claim 66, wherein annealing to stabilize the compound comprises annealing in a temperature greater than about 850 degrees Celsius and  
10 less than about 1000 degrees Celsius.

70. A method of forming a field emission device, comprising:  
forming an emitter tip on a substrate;  
implanting a substance on at least a portion of the emitter tip so as to form  
15 an implanted layer having a relative dielectric constant less than about the relative dielectric constant of the emitter tip;  
annealing to stabilize the implanted layer in the emitter tip; and  
forming an anode opposite the emitter tip.

71. The method of claim 70, wherein implanting a substance comprises implanting a desired dose of oxygen ions on the order of about  $10^{17}$  per square centimeter.

5 72. The method of claim 70, wherein annealing to stabilize the compound comprises annealing through a rapid thermal process using nitrogen.

73. The method of claim 70, wherein annealing to stabilize the compound comprises annealing in a temperature greater than about 850 degrees Celsius and  
10 less than about 1000 degrees Celsius.

74. The method of claim 70, wherein implanting the substance comprises implanting at a depth greater than about 50 Angstroms and less than about 100 Angstroms.  
15

75. A method of forming a field emission device, comprising:  
forming an emitter tip containing silicon on a substrate;  
implanting a dose of oxygen ions of about  $10^{17}$  per square centimeter on at  
least a portion of the emitter tip so as to create a relative dielectric constant of the  
20 emitter tip greater than about 3.0 and less than about 12;  
annealing in nitrogen to form a layer of silicon oxide embedded at a depth

greater than about 50 Angstroms and less than about 100 Angstroms in the emitter tip using a rapid thermal process at a temperature greater than about 850 degrees Celsius and less than about 1000 degrees Celsius; and  
forming an anode opposite the emitter tip.

5

76. A method of forming a field emission device, comprising:  
forming an emitter tip containing silicon on a substrate;  
implanting a dose of oxygen ions of about  $10^{17}$  per square centimeters in at least a portion of the emitter tip;  
annealing in nitrogen to form a layer of silicon dioxide embedded at a depth greater than about 50 Angstroms and less than about 100 Angstroms in the emitter tip using a rapid thermal process at a temperature greater than about 850 degrees Celsius and less than about 1000 degrees Celsius; and  
forming an anode opposite the emitter tip.

10

15

77. The method of claim 76, wherein implanting the dose of oxygen ions comprises implanting oxygen ions to form a superoxide compound.

78. A method of forming a field emission device, comprising:

20

forming an emitter tip on a substrate;  
implanting a species of nitrogen at greater than about 50 Angstroms and

less than about 100 Angstroms from the surface of the emitter tip;

annealing to form a compound containing the species of nitrogen embedded  
in the emitter tip; and

forming an anode opposite the emitter tip.

5

79. A method of forming a field emission device, comprising:

forming an emitter tip on a substrate;

implanting ionic nitride on at least a portion of the emitter tip;

annealing to form a compound containing nitride embedded in the emitter

10 tip; and

forming an anode opposite the emitter tip.

80. A method of forming a field emission device, comprising:

forming an emitter tip on a substrate;

15 depositing a layer of low relative dielectric constant material over the  
emitter tip so as to enhance the emission of electrons;

depositing a layer of a substance over the layer of low relative dielectric  
constant material; and

forming an anode opposite the emitter tip.

20

81. The method of claim 80, wherein depositing the layer of low relative

dielectric constant material comprises depositing through a uniform-step-coverage technique to form a uniform thickness layer of the low relative dielectric constant material.

5     82.     The method of claim 80, wherein depositing the layer of low relative dielectric constant material comprises depositing a layer of a material having a dielectric constant less than about 12.

83.     The method of claim 80, wherein depositing the layer of the substance  
10     comprises depositing to form a thickness greater than about 50 Angstroms and less than about 100 Angstroms.

84.     The method of claim 80, wherein depositing the layer of the substance  
15     comprises depositing an amorphous and continuous film of the substance.


85.     The method of claim 80, wherein depositing the layer of the substance  
         comprises depositing an amorphous and continuous film of silicon.

STRUCTURES AND METHODS TO ENHANCE FIELD EMISSION IN  
FIELD EMITTER DEVICES

Abstract of the Disclosure

5 Structures and methods to ease electron emission and limit outgassing so as  
to inhibit degradation to the electron beam of a field emitter device are described.  
In one method to ease such electron emission, a layer of low relative dielectric  
constant material is formed under the surface of the field emitter tip. Another  
method is to coat the field emitter tip with a low relative dielectric constant  
10 substance or compound to form a layer and then cover that layer with a thin layer  
of the material of the field emitter tip.

"Express Mail" mailing label number: EL254618052US  
Date of Deposit: August 31, 1999  
I hereby certify that this paper or fee is being deposited with the  
United States Postal Service "Express Mail Post Office to Addressee"  
service under 37 CFR 1.10 on the date indicated above and is  
addressed to the Assistant Commissioner for Patents,  
Washington, D.C. 20231  
Printed Name Chris Hammond  
Signature Chris Hammond

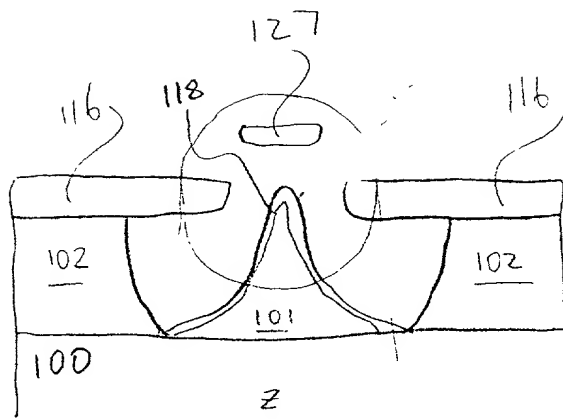

120  
A

FIG. 1 A

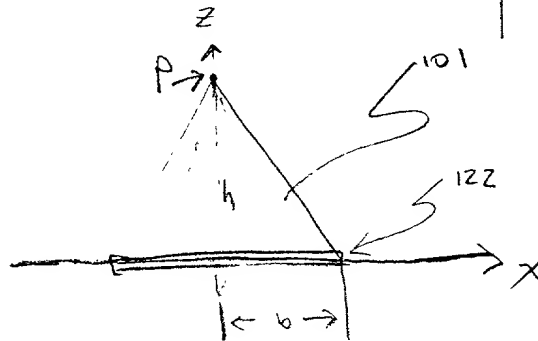


FIG 1 B

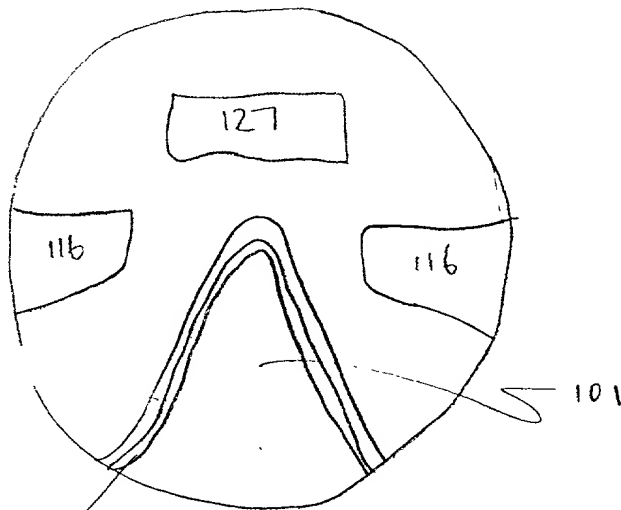


FIG 1 C

118

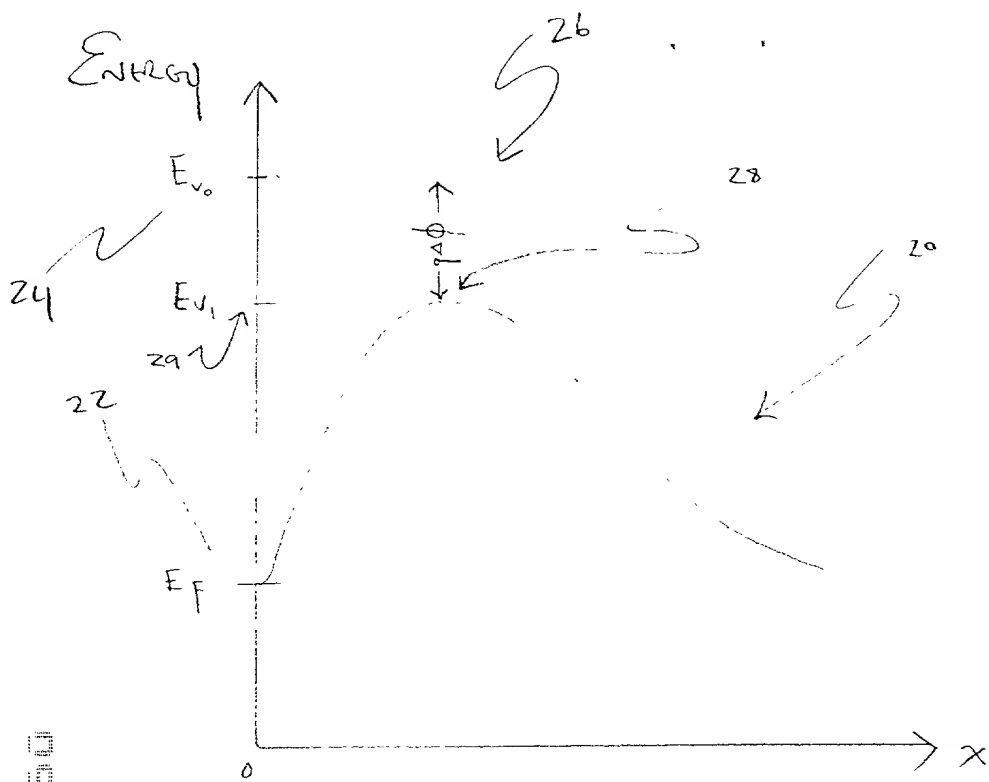


FIG. 2

2024 RELEASE UNDER E.O. 14176



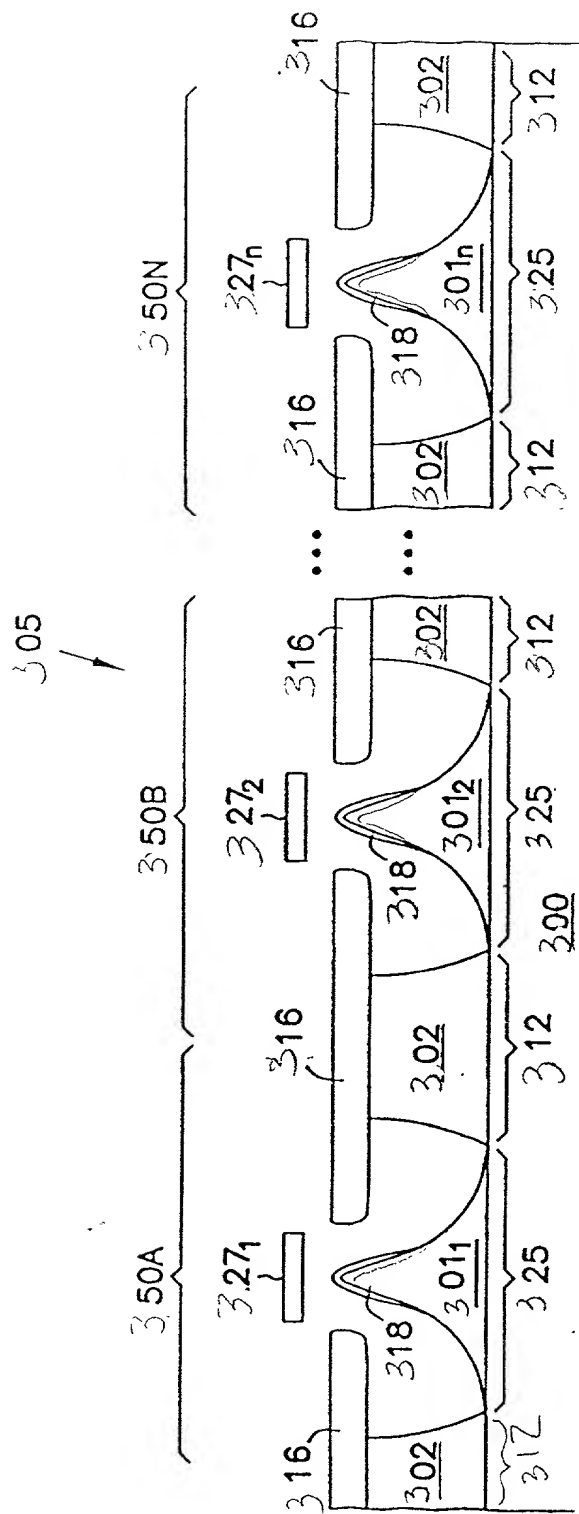


FIG. 3

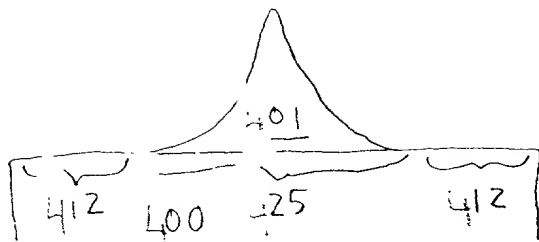


FIG. 4A

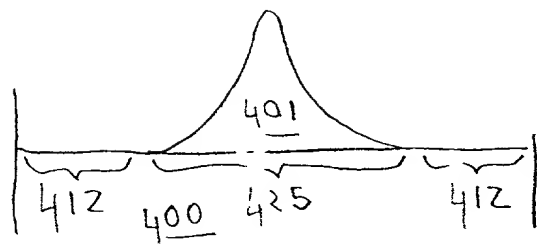
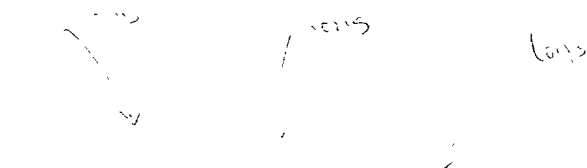


FIG. 4B

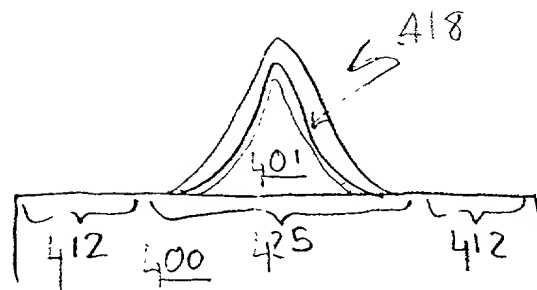


FIG. 4C

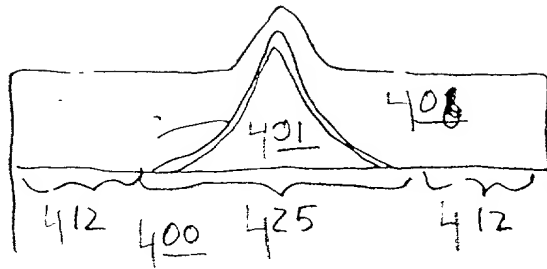


FIG. 4D

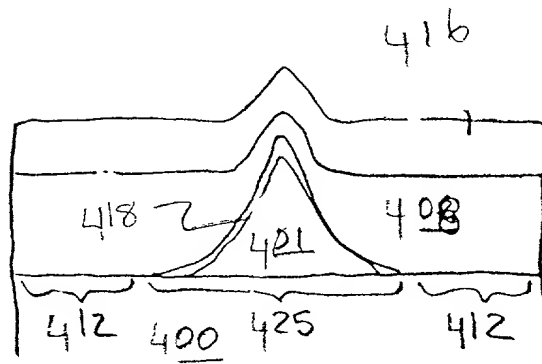


FIG. 4E

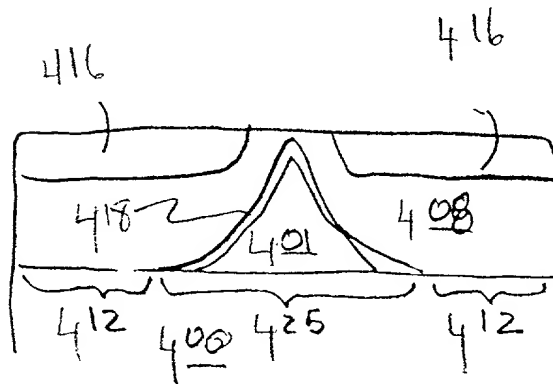


FIG. 4F

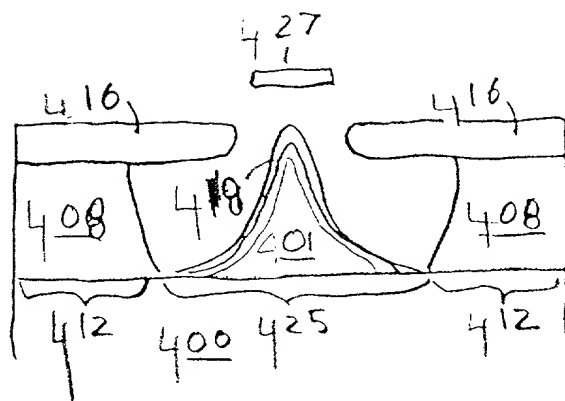


FIG 4G

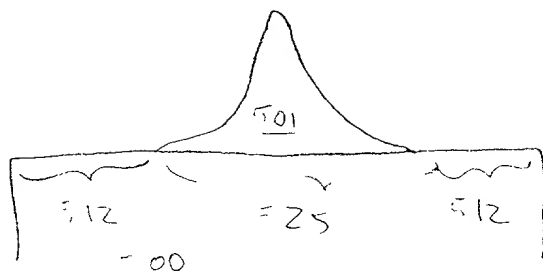


FIG 5A

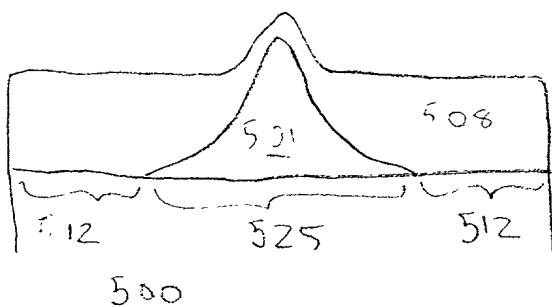


FIG. 5B

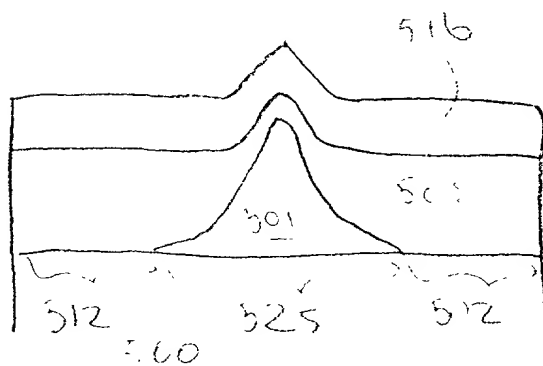


FIG. 5C

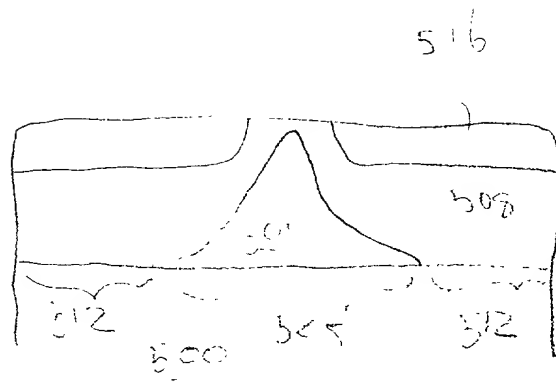


FIG 5D

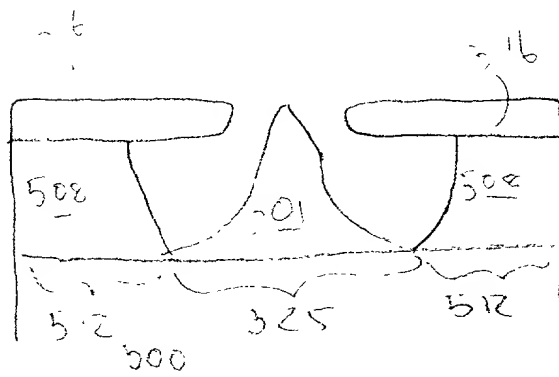


FIG 5E

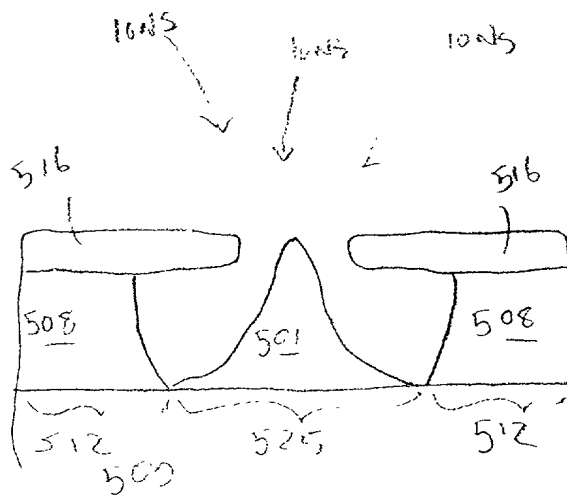


FIG 5F



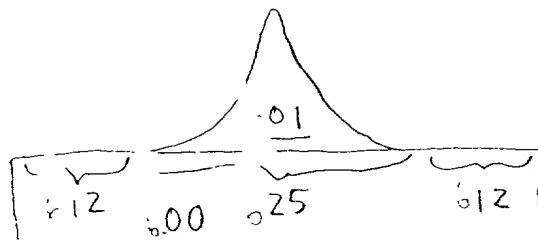


FIG. 6A

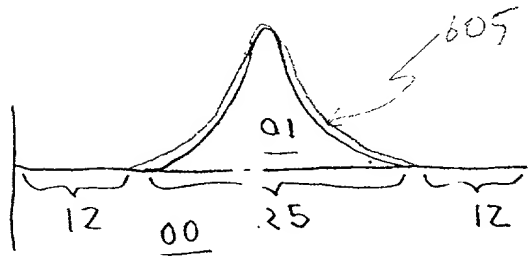


FIG. 6B

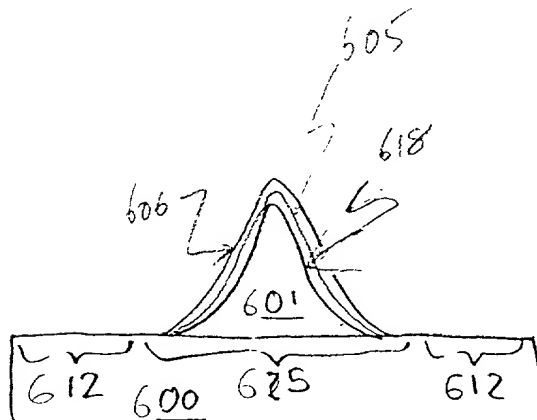


FIG. 6C



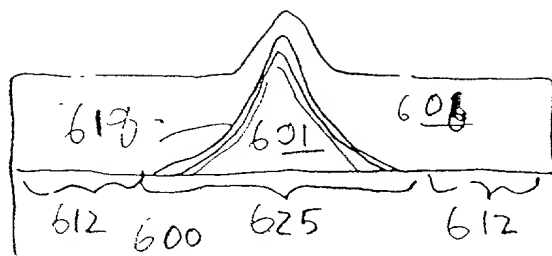


FIG. 6D

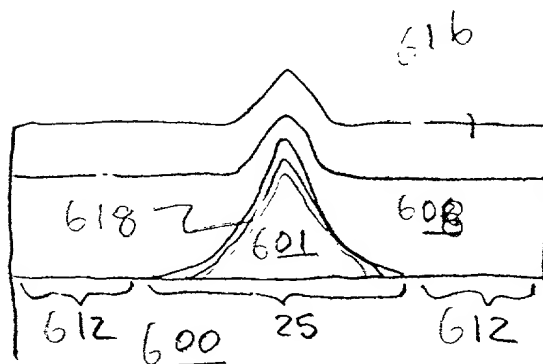


FIG. 6E

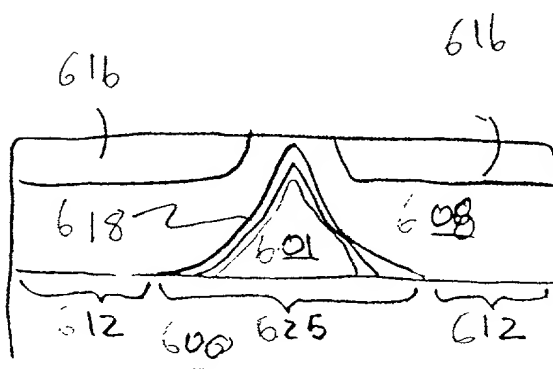


FIG. 6F

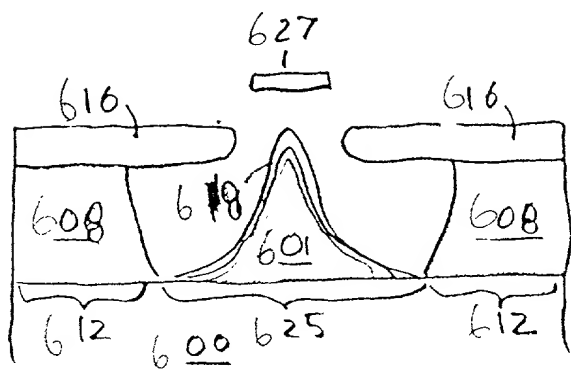


FIG 6 G

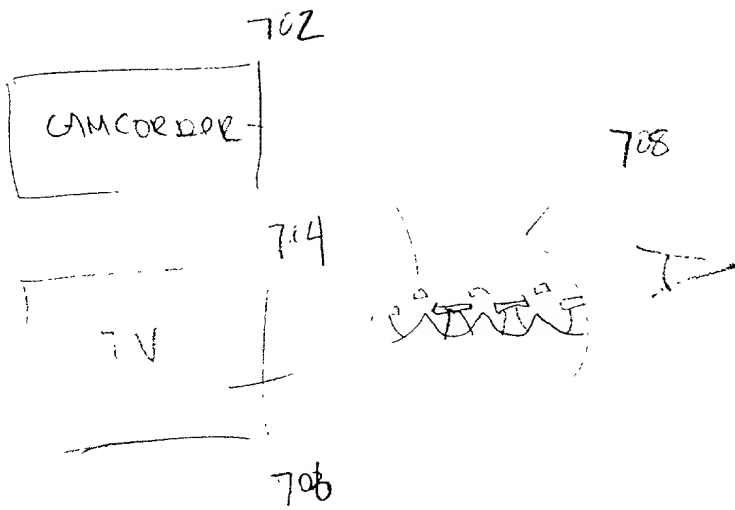


FIG. 7

PERSONAL  
APPLIANCE

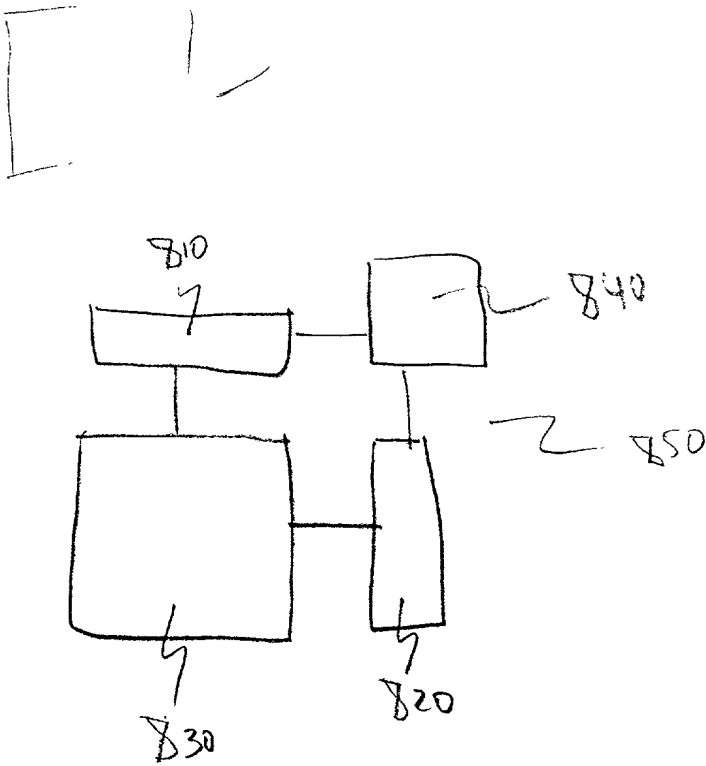


FIG. 8

**DECLARATION FOR PATENT APPLICATION**

As a below named inventor I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**STRUCTURES AND METHODS TO ENHANCE FIELD EMISSION IN FIELD EMITTER DEVICES .**

The specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (see page 3 attached hereto).

I hereby claim foreign priority benefits under Title 35, United States Code, §119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

**No such claim for priority is being made at this time.**

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

**No such claim for priority is being made at this time.**

I hereby claim the benefit under Title 35, United States Code, § 120/365 of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application.

**No such claim for priority is being made at this time.**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of sole inventor : **Yongjun Hu**  
Citizenship: **Peoples Republic of China**  
Post Office Address: 2470 Canal St., #203  
Boise, ID 83705

Residence: **Boise, ID**

Signature: \_\_\_\_\_

Yongjun Hu

Date: \_\_\_\_\_

08/27/98

Full Name of inventor:  
Citizenship:  
Post Office Address:

Residence:

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Full Name of inventor:  
Citizenship:  
Post Office Address:

Residence:

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Full Name of inventor:  
Citizenship:  
Post Office Address:

Residence:

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

§ 1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) it refutes, or is inconsistent with, a position the applicant takes in:
  - (i) opposing an argument of unpatentability relied on by the Office, or
  - (ii) asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.